



# RADIO TEST REPORT

**Report Number**.....: **ZKT-25111727433E-3**

Date of Test..... Nov. 17, 2025 to Nov. 24, 2025

Date of issue.....: Nov. 24, 2025

Total number of pages..... 51

Test Result .....: PASS

**Testing Laboratory**.....: **Shenzhen ZKT Technology Co., Ltd.**

Address .....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

**Applicant's name** .....: **Shenzhen Wanida Technology Co., Ltd**

Address .....: Room 305,Building A,365 Maker Park, No.6340 of Pingshan Avenue, Kengzi Street,Pingshan District,Shenzhen,China

**Manufacturer's name** .....: **Shenzhen Wanida Technology Co., Ltd**

Address .....: Room 305,Building A,365 Maker Park, No.6340 of Pingshan Avenue, Kengzi Street,Pingshan District,Shenzhen,China

**Test specification:**

Standard.....: ETSI EN 300 328 V2.2.2 (2019-07)

Test procedure.....: /

Non-standard test method .....: N/A

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

**Product name**.....: **TWS Bluetooth headset**

Trademark .....: N/A

Model/Type reference.....: MTV-43 (I7 MINI)


Ratings.....: Input: 5 V  $\overline{=}$  1A  
Li-ion Battery: 3.7 V $\overline{=}$ 30mAh 0.111Wh(Earphone)  
Battery: 3.7 V $\overline{=}$ 3.7V, 400mAh, 1.48Wh(Charging Box)



**Testing procedure and testing location:**

**Testing Laboratory**.....: **Shenzhen ZKT Technology Co., Ltd.**  
**Address**.....: 1/F, No. 101, Building B, No. 6, Tangwei Community  
Industrial Avenue, Fuhai Street, Bao'an District,  
Shenzhen, China

---

**Tested by (name + signature)**.....: Jim Liu 

---

**Reviewer (name + signature)**.....: Jackson Fang 

---

**Approved (name + signature)**.....: Lake Xie   


---



## TABLE OF CONTENT

|                                                                                             | Page      |
|---------------------------------------------------------------------------------------------|-----------|
| <b>1. VERSION .....</b>                                                                     | <b>5</b>  |
| <b>2.TEST SUMMARY .....</b>                                                                 | <b>6</b>  |
| <b>3.MEASUREMENT UNCERTAINTY .....</b>                                                      | <b>7</b>  |
| 3.1 TEST FACILITY .....                                                                     | 7         |
| 3.2 MEASUREMENT UNCERTAINTY .....                                                           | 7         |
| <b>4.GENERAL INFORMATION .....</b>                                                          | <b>8</b>  |
| 4.1 General Description Of EUT .....                                                        | 8         |
| 4.2 Test Setup Configuration .....                                                          | 8         |
| 4.3 Support Equipment .....                                                                 | 8         |
| 4.4 Test Mode .....                                                                         | 9         |
| 4.5 Test Environment .....                                                                  | 9         |
| 4.6 Equipments List For All Test Items .....                                                | 10        |
| <b>5.INFORMATION AS REQUIRED .....</b>                                                      | <b>10</b> |
| <b>6. RF OUTPUT POWER .....</b>                                                             | <b>15</b> |
| 6.1 Block Diagram Of Test Setup .....                                                       | 15        |
| 6.2 Limit .....                                                                             | 15        |
| 6.3 Test procedure .....                                                                    | 15        |
| 6.4 Test Result .....                                                                       | 16        |
| <b>7.ACCUMULATED TRANSMIT TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE .....</b> | <b>17</b> |
| 7.1 Block Diagram Of Test Setup .....                                                       | 17        |
| 7.2 Limit .....                                                                             | 17        |
| 7.3 Test procedure .....                                                                    | 17        |
| 7.4 Test Result .....                                                                       | 20        |
| <b>8.HOPPING FREQUENCY SEPARATION .....</b>                                                 | <b>21</b> |
| 8.1 Block Diagram Of Test Setup .....                                                       | 21        |
| 8.2 Limit .....                                                                             | 21        |
| 8.3 Test procedure .....                                                                    | 21        |
| 8.4 Test Result .....                                                                       | 23        |
| <b>9.ADAPTIVITY (ADAPTIVE FREQUENCY HOPPING) .....</b>                                      | <b>24</b> |
| 9.1 Limit .....                                                                             | 24        |
| 9.2 Test conditions .....                                                                   | 25        |
| 9.3 Test procedure .....                                                                    | 25        |
| 9.4 Test Result .....                                                                       | 25        |
| <b>10. OCCUPIED CHANNEL BANDWIDTH .....</b>                                                 | <b>26</b> |
| 10.1 Block Diagram Of Test Setup .....                                                      | 26        |
| 10.2 Limit .....                                                                            | 26        |
| 10.3 Test procedure .....                                                                   | 26        |
| 10.4 Test Result .....                                                                      | 27        |
| <b>11. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN</b>                         | <b>28</b> |
| 11.1 Block Diagram Of Test Setup .....                                                      | 28        |
| 11.2 Limit .....                                                                            | 28        |
| 11.3 Test procedure .....                                                                   | 28        |
| 11.4 Test Result .....                                                                      | 31        |
| <b>12. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN .....</b>                      | <b>32</b> |
| 12.1 Block Diagram Of Test Setup .....                                                      | 32        |
| 12.2 Limits .....                                                                           | 33        |
| 12.3 Test Procedure .....                                                                   | 33        |



|                                             |           |
|---------------------------------------------|-----------|
| 12.4 Test Results .....                     | 35        |
| <b>13.RECEIVER SPURIOUS EMISSIONS .....</b> | <b>36</b> |
| 13.1 Block Diagram Of Test Setup .....      | 36        |
| 13.2 Limits .....                           | 37        |
| 13.3 Test Procedure .....                   | 37        |
| 13.4 Test Results .....                     | 38        |
| <b>14. RECEIVER BLOCKING .....</b>          | <b>39</b> |
| 14.1 Block Diagram Of Test Setup .....      | 39        |
| 14.2 Limit .....                            | 39        |
| 14.3 Test procedure .....                   | 40        |
| 14.4 Test Result .....                      | 41        |
| <b>15. EUT TEST SETUP PHOTOGRAPHS .....</b> | <b>42</b> |
| <b>16.EUT PHOTOGRAPHS .....</b>             | <b>43</b> |



### 1. VERSION

| Report No.         | Issue Date    | Description | Approved |
|--------------------|---------------|-------------|----------|
| ZKT-25111727433E-3 | Nov. 24, 2025 | Original    | Valid    |
|                    |               |             |          |



## 2.TEST SUMMARY

The Product has been tested according to the following specifications:

| No.                                                                                                                                                              | Test Parameter                                                       | Clause No | Results |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------|---------|
| Transmitter Parameters                                                                                                                                           |                                                                      |           |         |
| 1                                                                                                                                                                | RF output power                                                      | 4.3.1.2   | PASS    |
| 2                                                                                                                                                                | Duty Cycle, Tx-sequence, Tx-gap                                      | 4.3.1.3   | N/A     |
| 3                                                                                                                                                                | Accumulated Transmit Time, Frequency Occupation and Hopping Sequence | 4.3.1.4   | PASS    |
| 4                                                                                                                                                                | Hopping Frequency Separation                                         | 4.3.1.5   | PASS    |
| 5                                                                                                                                                                | Medium Utilization (MU) factor                                       | 4.3.1.6   | N/A     |
| 6                                                                                                                                                                | Adaptivity (Adaptive Frequency Hopping)                              | 4.3.1.7   | N/A     |
| 7                                                                                                                                                                | Occupied Channel Bandwidth                                           | 4.3.1.8   | PASS    |
| 8                                                                                                                                                                | Transmitter unwanted emissions in the out-of-band domain             | 4.3.1.9   | PASS    |
| 9                                                                                                                                                                | Transmitter unwanted emissions in the spurious domain (Radiated)     | 4.3.1.10  | PASS    |
| Receiver Parameters                                                                                                                                              |                                                                      |           |         |
| 10                                                                                                                                                               | Receiver spurious emissions (Radiated)                               | 4.3.1.11  | PASS    |
| 11                                                                                                                                                               | Receiver Blocking                                                    | 4.3.1.12  | PASS    |
| 12                                                                                                                                                               | Geo-location Capability                                              | 4.3.1.13  | N/A     |
| Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device. |                                                                      |           |         |

Remark:

N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.



### 3.MEASUREMENT UNCERTAINTY

#### 3.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.  
Add.: ZKT Building & 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China  
FCC Test Firm Registration Number: 712850  
IC Registered No.: 23583

#### 3.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                                              | Uncertainty |
|-----|---------------------------------------------------|-------------|
| 1   | 3m chamber Radiated spurious emission(9KHz-30MHz) | U=4.5dB     |
| 2   | 3m chamber Radiated spurious emission(30MHz-1GHz) | U=4.8dB     |
| 3   | 3m chamber Radiated spurious emission(1GHz-6GHz)  | U=4.9dB     |
| 4   | 3m chamber Radiated spurious emission(6GHz-40GHz) | U=5.0dB     |
| 5   | Conducted disturbance                             | U=3.2dB     |
| 6   | RF Band Edge                                      | U=1.68dB    |
| 7   | RF power conducted                                | U=1.86dB    |
| 8   | RF conducted Spurious Emission                    | U=2.2dB     |
| 9   | RF Occupied Bandwidth                             | U=1.8dB     |
| 10  | RF Power Spectral Density                         | U=1.75dB    |
| 11  | humidity uncertainty                              | U=5.3%      |
| 12  | Temperature uncertainty                           | U=0.59°C    |



#### 4.GENERAL INFORMATION

##### 4.1 General Description Of EUT

|                       |                                                                                                                  |
|-----------------------|------------------------------------------------------------------------------------------------------------------|
| Product Name:         | TWS Bluetooth headset                                                                                            |
| Model No.:            | MTV-43 (I7 MINI)                                                                                                 |
| Series Models:        | N/A                                                                                                              |
| Model Difference:     | N/A                                                                                                              |
| Hardware Version:     | /                                                                                                                |
| Software Version:     | /                                                                                                                |
| Channel Number:       | 79 channels                                                                                                      |
| Channel Spacing:      | 1MHz                                                                                                             |
| Operation Frequency:  | 2402-2480MHz                                                                                                     |
| Max. EIRP:            | 1.10 dBm                                                                                                         |
| Bluetooth Version:    | V5.0                                                                                                             |
| Modulation Type:      | GFSK, $\pi/4$ -DQPSK, 8-DPSK                                                                                     |
| Antenna installation: | PCB antenna                                                                                                      |
| Antenna Gain :        | 0dBi<br>Note: the antenna gain is provided by the customer, and the final test result has nothing to do with us. |
| Power Supply:         | Input: 5 V --- 1A                                                                                                |
| Battery Capacity:     | 3.7 V---30mAh 0.111Wh(Earphone)<br>3.7 V---3.7V, 400mAh, 1.48Wh(Charging Box)                                    |

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

| No. | Device Type | Brand | Model | Series No. | Data Cable | Power Cord |
|-----|-------------|-------|-------|------------|------------|------------|
| 1.  | ---         | ---   | ---   | ---        | ---        | --         |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



#### 4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

| Test mode                                      | Low channel | Middle channel | High channel |
|------------------------------------------------|-------------|----------------|--------------|
| Transmitting<br>(GFSK, $\pi/4$ -DQPSK, 8-DPSK) | 2402MHz     | 2441MHz        | 2480MHz      |
| Receiving<br>(GFSK, $\pi/4$ -DQPSK, 8-DPSK)    | 2402MHz     | 2441MHz        | 2480MHz      |

#### 4.5 Test Environment

Extreme Test Conditions:

For tests at extreme temperatures, measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

For tests at extreme voltages, measurements shall be made over the extremes of the power source voltage range as declared by the manufacturer.

| Test Conditions   | LTLV | LTHV | HTHV | HTLV |
|-------------------|------|------|------|------|
| Temperature (°C)  | -10  | -10  | 40   | 40   |
| Test Voltage (DC) | 3.1  | 4.3  | 4.3  | 3.1  |



#### 4.6 Equipments List For All Test Items

##### Radiation Emissions & Radiation Spurious Emissions Test

| Item | Equipment                         | Manufacturer   | Type No.        | Serial No.         | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|----------------|-----------------|--------------------|------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz)  | KEYSIGHT       | N9020A          | MY55370835         | A.17.05          | Sep. 29, 2025    | Sep. 28, 2026    |
| 2    | Spectrum Analyzer (10kHz-39.9GHz) | R&S            | FSV40-N         | 100363             | 1.71 SP2         | Sep. 30, 2025    | Sep. 29, 2026    |
| 3    | EMI Test Receiver (9kHz-7GHz)     | R&S            | ESC17           | 100969             | 4.32             | Sep. 29, 2025    | Sep. 28, 2026    |
| 4    | Bilog Antenna (30MHz-1500MHz)     | Schwarzbeck    | VULB9168        | 00877              | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 5    | Horn Antenna (1GHz-18GHz)         | Agilent        | AH-118          | 071145             | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 6    | Horn Antenna (15GHz-40GHz)        | A.H.System     | SAS-574         | 588                | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 7    | Loop Antenna                      | TESEQ          | HLA6121         | 58357              | N/A              | Oct. 11, 2025    | Oct. 10, 2026    |
| 8    | Amplifier (30-1000MHz)            | EM Electronics | EM330 Amplifier | 60747              | N/A              | Sep. 29, 2025    | Sep. 28, 2026    |
| 9    | Amplifier (1GHz-26.5GHz)          | HuiPu          | 8449B           | 3008A00315         | N/A              | Sep. 29, 2025    | Sep. 28, 2026    |
| 10   | Amplifier (500MHz-40GHz)          | QuanJuDa       | DLE-161         | 097                | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 11   | Test Cable                        | N/A            | R-01            | N/A                | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 12   | Test Cable                        | N/A            | R-02            | N/A                | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 13   | Test Cable                        | N/A            | R-03            | N/A                | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 14   | D.C. Power Supply                 | LongWei        | TPR-6405D       | N/A                | N/A              | \                | \                |
| 15   | EMC Software                      | Frad           | EZ-EMC          | Ver.EMC-CO N 3A1.1 | N/A              | \                | \                |
| 16   | Turntable                         | MF             | MF-7802BS       | N/A                | N/A              | \                | \                |
| 17   | Antenna tower                     | MF             | MF-7802BS       | N/A                | N/A              | \                | \                |



RF Conducted Test

| Item | Equipment                         | Manufacturer | Type No.    | Serial No.  | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|--------------|-------------|-------------|------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz)  | KEYSIGHT     | N9020A      | MY55370835  | A.17.05          | Sep. 29, 2025    | Sep. 28, 2026    |
| 2    | Spectrum Analyzer (10kHz-39.9GHz) | R&S          | FSV40-N     | 100363      | 1.71 SP2         | Sep. 30, 2025    | Sep. 29, 2026    |
| 3    | Test Cable                        | N/A          | RF-01       | N/A         | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 4    | Test Cable                        | N/A          | RF-02       | N/A         | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 5    | Test Cable                        | N/A          | RF-03       | N/A         | N/A              | Sep. 30, 2025    | Sep. 29, 2026    |
| 6    | ESG Signal Generator              | Agilent      | E4421B      | N/A         | B.03.84          | Sep. 29, 2025    | Sep. 28, 2026    |
| 7    | Signal Generator                  | Agilent      | N5182A      | N/A         | A.01.87          | Sep. 29, 2025    | Sep. 28, 2026    |
| 8    | Magnetic Field Probe Tester       | Narda        | ELT-400     | 0-0344      | N/A              | Sep. 29, 2025    | Sep. 28, 2026    |
| 9    | SHIELD BOX                        | TESCOM       | TC-5970C    | 5970C015553 | N/A              | Dec. 18, 2025    | Dec. 17, 2026    |
| 10   | Wideband Radio Communication Test | R&S          | CMW500      | 106504      | V 3.7.22         | Sep. 30, 2025    | Sep. 29, 2026    |
| 11   | MWRF Power Meter Test system      | MW           | MW100-RF CB | N/A         | N/A              | Sep. 29, 2025    | Sep. 28, 2026    |
| 12   | D.C. Power Supply                 | LongWei      | TPR-6405 D  | N/A         | N/A              | \                | \                |
| 13   | RF Software                       | MW           | MTS8310     | V2.0.0.0    | N/A              | \                | \                |



**5. INFORMATION AS REQUIRED**

ETSI EN 300 328 Annex E

|                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a) The type of modulation used by the equipment:                                                                                                                                                                    |
| <input checked="" type="checkbox"/> FHSS                                                                                                                                                                            |
| <input type="checkbox"/> other forms of modulation                                                                                                                                                                  |
| b) In case of FHSS modulation:                                                                                                                                                                                      |
| <input type="checkbox"/> In case of non-Adaptive Frequency Hopping equipment:                                                                                                                                       |
| The number of Hopping Frequencies: _                                                                                                                                                                                |
| <input checked="" type="checkbox"/> In case of Adaptive Frequency Hopping Equipment:                                                                                                                                |
| The maximum number of Hopping Frequencies: <u>79</u>                                                                                                                                                                |
| The minimum number of Hopping Frequencies: <u>79</u>                                                                                                                                                                |
| <input checked="" type="checkbox"/> The (average) Dwell Time:                                                                                                                                                       |
| c) Adaptive / non-adaptive equipment:                                                                                                                                                                               |
| <input type="checkbox"/> non-adaptive Equipment                                                                                                                                                                     |
| <input checked="" type="checkbox"/> adaptive Equipment without the possibility to switch to a non-adaptive mode                                                                                                     |
| <input type="checkbox"/> adaptive Equipment which can also operate in a non-adaptive mode                                                                                                                           |
| d) In case of adaptive equipment:                                                                                                                                                                                   |
| The Channel Occupancy Time implemented by the equipment:                                                                                                                                                            |
| <input checked="" type="checkbox"/> The equipment has implemented an LBT based DAA mechanism                                                                                                                        |
| The CCA time implemented by the equipment: ..... $\mu$ s                                                                                                                                                            |
| <input type="checkbox"/> The equipment has implemented a non-LBT based DAA mechanism                                                                                                                                |
| <input type="checkbox"/> The equipment can operate in more than one adaptive mode                                                                                                                                   |
| e) In case of non-adaptive Equipment:                                                                                                                                                                               |
| The maximum RF Output Power (e.i.r.p.): dbm                                                                                                                                                                         |
| The maximum (corresponding) Duty Cycle:                                                                                                                                                                             |
| Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):<br>.....                                         |
| f) The worst case operational mode for each of the following tests:                                                                                                                                                 |
| <input checked="" type="checkbox"/> RF Output Power: GFSK, $\pi/4$ -DQPSK, 8-DPSK                                                                                                                                   |
| <input type="checkbox"/> Power Spectral Density:                                                                                                                                                                    |
| <input type="checkbox"/> Duty cycle, Tx-Sequence, Tx-gap:                                                                                                                                                           |
| <input checked="" type="checkbox"/> Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment): GFSK                                                                              |
| <input checked="" type="checkbox"/> Hopping Frequency Separation (only for FHSS equipment): GFSK                                                                                                                    |
| <input type="checkbox"/> Medium Utilization:                                                                                                                                                                        |
| <input type="checkbox"/> Adaptivity:                                                                                                                                                                                |
| <input checked="" type="checkbox"/> Nominal Channel Bandwidth: GFSK                                                                                                                                                 |
| <input checked="" type="checkbox"/> Transmitter unwanted emissions in the OOB domain: GFSK                                                                                                                          |
| <input checked="" type="checkbox"/> Transmitter unwanted emissions in the spurious domain: GFSK                                                                                                                     |
| <input checked="" type="checkbox"/> Receiver spurious emissions : GFSK                                                                                                                                              |
| <input checked="" type="checkbox"/> Receiver blocking : GFSK                                                                                                                                                        |
| g) The different transmit operating modes (tick all that apply):                                                                                                                                                    |
| <input checked="" type="checkbox"/> Operating mode 1: Single Antenna Equipment                                                                                                                                      |
| <input type="checkbox"/> Equipment with only one antenna                                                                                                                                                            |
| <input type="checkbox"/> Equipment with two diversity antennas but only one antenna active at any moment in time                                                                                                    |
| <input checked="" type="checkbox"/> Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only One antenna is used (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems) |
| <input type="checkbox"/> Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming                                                                                                           |
| <input type="checkbox"/> Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)                                                                                                        |
| <input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1                                                                                                                     |
| <input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2                                                                                                                     |
| NOTE 1: Add more lines if more channel bandwidths are supported.                                                                                                                                                    |
| <input type="checkbox"/> Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming                                                                                                              |
| <input type="checkbox"/> Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)                                                                                                          |
| <input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1                                                                                                                     |



| <input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2                                                                                                                                                                                                                                                                                            |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------|---------------------------|---------------------------|---|--|--|--|---|--|--|--|---|--|--|--|---|--|--|--|
| NOTE 2: Add more lines if more channel bandwidths are supported.                                                                                                                                                                                                                                                                                                                           |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| h) In case of Smart Antenna Systems:                                                                                                                                                                                                                                                                                                                                                       |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| The number of Receive chains:                                                                                                                                                                                                                                                                                                                                                              |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| The number of Transmit chains:                                                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> symmetrical power distribution                                                                                                                                                                                                                                                                                                                                    |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> asymmetrical power distribution                                                                                                                                                                                                                                                                                                                                   |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| In case of beam forming, the maximum (additional) beam forming gain:                                                                                                                                                                                                                                                                                                                       |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE: The additional beam forming gain does not include the basic gain of a single antenna.                                                                                                                                                                                                                                                                                                |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| i) Operating Frequency Range(s) of the equipment:                                                                                                                                                                                                                                                                                                                                          |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Operating Frequency Range 1: Refer to section 4.1                                                                                                                                                                                                                                                                                                                                          |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Operating Frequency Range 2: _                                                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE: Add more lines if more Frequency Ranges are supported.                                                                                                                                                                                                                                                                                                                               |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| j) Nominal Channel Bandwidth(s):                                                                                                                                                                                                                                                                                                                                                           |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Nominal Channel Bandwidth 1:                                                                                                                                                                                                                                                                                                                                                               |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE: Add more lines if more channel bandwidths are supported.                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):                                                                                                                                                                                                                                                                                                                  |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input checked="" type="checkbox"/> Stand-alone                                                                                                                                                                                                                                                                                                                                            |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)                                                                                                                                                                                                                                                          |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Plug-in radio device (Equipment intended for a variety of host systems)                                                                                                                                                                                                                                                                                           |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Other                                                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| l) The normal and the extreme operating conditions that apply to the equipment:                                                                                                                                                                                                                                                                                                            |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Refer to section 4.6                                                                                                                                                                                                                                                                                                                                                                       |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p. levels:                                                                                                                                                                                                                                           |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Antenna Type:                                                                                                                                                                                                                                                                                                                                                                              |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input checked="" type="checkbox"/> PCB antennas (information to be provided in case of conducted measurements)                                                                                                                                                                                                                                                                            |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Antenna Gain: Refer to section 4.1                                                                                                                                                                                                                                                                                                                                                         |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| If applicable, additional beamforming gain (excluding basic antenna gain):                                                                                                                                                                                                                                                                                                                 |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Temporary RF connector provided                                                                                                                                                                                                                                                                                                                                   |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> No temporary RF connector provided                                                                                                                                                                                                                                                                                                                                |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Dedicated Antennas (equipment with antenna connector)                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Single power level with corresponding antenna(s)                                                                                                                                                                                                                                                                                                                  |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <input type="checkbox"/> Multiple power settings and corresponding antenna(s)                                                                                                                                                                                                                                                                                                              |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Number of different Power Levels:                                                                                                                                                                                                                                                                                                                                                          |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Power Level 1:                                                                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Power Level 2:                                                                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Power Level 3:                                                                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE 1: Add more lines in case the equipment has more power levels.                                                                                                                                                                                                                                                                                                                        |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE 2: These power levels are conducted power levels (at antenna connector).                                                                                                                                                                                                                                                                                                              |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable                                                                                                                                                                                     |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Power Level 1:                                                                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Number of antenna assemblies provided for this power level:                                                                                                                                                                                                                                                                                                                                |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| <table border="1"> <thead> <tr> <th>Assembly #</th> <th>Gain (dBi)</th> <th>e.i.r.p.(dBm)</th> <th>Part number or model name</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Assembly # | Gain (dBi)    | e.i.r.p.(dBm)             | Part number or model name | 1 |  |  |  | 2 |  |  |  | 3 |  |  |  | 4 |  |  |  |
| Assembly #                                                                                                                                                                                                                                                                                                                                                                                 | Gain (dBi) | e.i.r.p.(dBm) | Part number or model name |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 1                                                                                                                                                                                                                                                                                                                                                                                          |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 2                                                                                                                                                                                                                                                                                                                                                                                          |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 3                                                                                                                                                                                                                                                                                                                                                                                          |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| 4                                                                                                                                                                                                                                                                                                                                                                                          |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.                                                                                                                                                                                                                                                                                                  |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Power Level 2:                                                                                                                                                                                                                                                                                                                                                                             |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |
| Number of antenna assemblies provided for this power level:                                                                                                                                                                                                                                                                                                                                |            |               |                           |                           |   |  |  |  |   |  |  |  |   |  |  |  |   |  |  |  |



| Assembly # | Gain (dBi) | e.i.r.p.(dBm) | Part number or model name |
|------------|------------|---------------|---------------------------|
| 1          |            |               |                           |
| 2          |            |               |                           |
| 3          |            |               |                           |
| 4          |            |               |                           |

NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3:

Number of antenna assemblies provided for this power level:

| Assembly # | Gain (dBi) | e.i.r.p.(dBm) | Part number or model name |
|------------|------------|---------------|---------------------------|
| 1          |            |               |                           |
| 2          |            |               |                           |
| 3          |            |               |                           |
| 4          |            |               |                           |

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Refer to section 8.

o) Describe the test modes available which can facilitate testing:

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], IEEE 802.15.4™ [i.4], proprietary, etc.):

q) If applicable, the statistical analysis referred to in clause 5.4.1 q) (to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r) (to be provided as separate attachment)

s) Geo-location capability supported by the equipment:

Yes

The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user


No

t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):



## 6. RF OUTPUT POWER

### 6.1 Block Diagram Of Test Setup

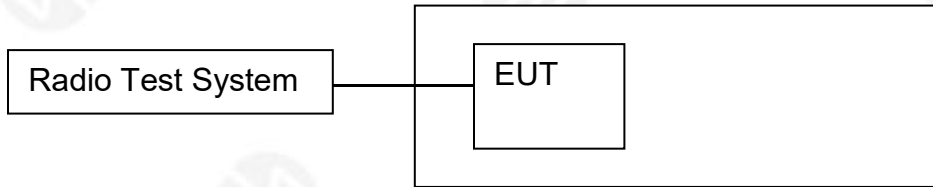

### 6.2 Limit

For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.3.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

| Limit |
|-------|
| 20dBm |

### 6.3 Test procedure

#### Step 1:

- Use a fast power sensor suitable for 2.4 GHz and capable of minimum 1 MS/s.
  - Use the following settings:
    - Sample speed 1 MS/s or faster.
    - The samples shall represent the RMS power of the signal.
    - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.
- NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

#### Step 2:

- For conducted measurements on devices with one transmit chain:
  - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
  - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
  - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
  - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps.

#### Step 3:

- Find the start and stop times of each burst in the stored measurement samples. The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.
- NOTE 2: In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.



Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 5:

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.
  - If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below:

$$P = A + G + Y$$

- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.


6.4 Test Result

| Modulation                          | Test conditions | Packet | Frequency (MHz) | Meas Duty Cycle (%) | Power (dBm)        |       |
|-------------------------------------|-----------------|--------|-----------------|---------------------|--------------------|-------|
|                                     |                 |        |                 |                     | Measured Conducted | EIRP  |
| GFSK                                | NVNT            | 1-DH5  | Hopping         | 77.83               | 1.09               | 1.10  |
|                                     | LVNT            |        | Hopping         | 78.10               | 0.97               | 0.97  |
|                                     | HVNT            |        | Hopping         | 77.74               | 0.92               | 0.92  |
| π/4-DQPSK                           | NVNT            | 2-DH5  | Hopping         | 77.98               | 0.56               | 0.56  |
|                                     | LVNT            |        | Hopping         | 77.49               | 0.53               | 0.53  |
|                                     | HVNT            |        | Hopping         | 77.97               | 0.47               | 0.47  |
| 8-DPSK                              | NVNT            | 3-DH5  | Hopping         | 77.57               | -0.11              | -0.11 |
|                                     | LVNT            |        | Hopping         | 78.22               | -0.13              | -0.13 |
|                                     | HVNT            |        | Hopping         | 77.67               | -0.11              | -0.11 |
| Limit                               |                 |        |                 |                     | ≤100mW (20dBm)     |       |
| Remark: EIRP = A + G + Y, G = 0dBi. |                 |        |                 |                     |                    |       |



## 7. ACCUMULATED TRANSMIT TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE

### 7.1 Block Diagram Of Test Setup

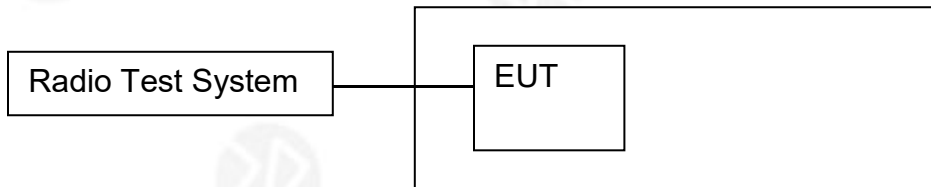

### 7.2 Limit

Adaptive FHSS equipment shall be capable of operating over a minimum of 70 % of the band specified in table 1.

**Table 1: Service frequency bands**

|          | Service frequency bands  |
|----------|--------------------------|
| Transmit | 2 400 MHz to 2 483,5 MHz |
| Receive  | 2 400 MHz to 2 483,5 MHz |

The Accumulated Transmit Time on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used. In order for the equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:

Option 1: Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.

Option 2: The occupation probability for each frequency shall be between  $((1 / U) \times 25 \%)$  and 77 % where U is the number of hopping frequencies in use.

The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

### 7.3 Test procedure

#### Step 1:

- The output of the transmitter shall be connected to a spectrum analyzer or equivalent.
- The analyzer shall be set as follows:
  - Centre Frequency: Equal to the hopping frequency being investigated
  - Frequency Span: 0 Hz
  - RBW: ~ 50 % of the Occupied Channel Bandwidth
  - VBW:  $\geq$  RBW
  - Detector Mode: RMS
  - Sweep time: Equal to the applicable observation period (see clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2)
  - Number of sweep points: 30 000
  - Trace mode: Clear / Write
  - Trigger: Free Run

#### Step 2:



- Save the trace data to a file for further analysis by a computing device using an appropriate software application or program.

Step 3:

- Identify the data points related to the frequency being investigated by applying a threshold.

The data points resulting from transmissions on the hopping frequency being investigated are assumed to have much higher levels compared to data points resulting from transmissions on adjacent hopping frequencies. If a clear determination between these transmissions is not possible, the RBW in step 1 shall be further reduced. In addition, a channel filter may be used.

- Count the number of data points identified as resulting from transmissions on the frequency being investigated and multiply this number by the time difference between two consecutive data points.

Step 4:

- The result in step 3 is the Accumulated Transmit Time which shall comply with the limit provided in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 and which shall be recorded in the test report.

Step 5:

NOTE 1: This step is only applicable for equipment implementing Option 1 in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 for complying with the Frequency Occupation requirement and the manufacturer decides to demonstrate compliance with this requirement via measurement.

- Make the following changes on the analyser and repeat step 2 and step 3.

Sweep time:  $4 \times \text{Dwell Time} \times \text{Actual number of hopping frequencies in use}$

The hopping frequencies occupied by the equipment without having transmissions during the dwell time (blacklisted frequencies) should be taken into account in the actual number of hopping frequencies in use. If this number cannot be determined (number of blacklisted frequencies unknown) it shall be assumed that the equipment uses the maximum possible number of hopping frequencies.

- The result shall be compared to the limit for the Frequency Occupation defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. The result of this comparison shall be recorded in the test report.

Step 6:

- Make the following changes on the analyzer:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483,5 MHz
- RBW: ~ 50 % of the Occupied Channel Bandwidth (single hopping frequency)
- VBW:  $\geq$  RBW
- Detector Mode: RMS
- Sweep time: 1 s
- Trace Mode: Max Hold
- Trigger: Free Run

NOTE 2: The above sweep time setting may result in long measuring times. To avoid such long measuring times, an FFT analyser could be used.



- Wait for the trace to stabilize. Identify the number of hopping frequencies used by the hopping sequence.
- The result shall be compared to the limit (value N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. This value shall be recorded in the test report.

For equipment with blacklisted frequencies, it might not be possible to verify the number of hopping frequencies in use. However they shall comply with the requirement for Accumulated Transmit Time and Frequency Occupation assuming the minimum number of hopping frequencies (N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 is used.

Step 7:

- For adaptive equipment, using the lowest and highest -20 dB points from the total spectrum envelope obtained in step 6, it shall be verified whether the equipment uses 70 % of the band specified in clause 1. The result shall be recorded in the test report.



## 7.4 Test Result

### Dwell Time One Burst

| Condition | Packet | Frequency (MHz) | Pulse Time (ms) | Burst Number |
|-----------|--------|-----------------|-----------------|--------------|
| NVNT      | 1-DH5  | 2441            | 2.882           | 107          |
| NVNT      | 2-DH5  | 2441            | 2.906           | 100          |
| NVNT      | 3-DH5  | 2441            | 2.916           | 93           |

### Accumulated Transmit Time

| Condition | Packet | Frequency (MHz) | Accumulated Transmit Time (ms) | Limit (ms) | Sweep Time (ms) | Result |
|-----------|--------|-----------------|--------------------------------|------------|-----------------|--------|
| NVNT      | 1-DH5  | 2441            | 308.760                        | <400       | 31600           | PASS   |
| NVNT      | 2-DH5  | 2441            | 291.863                        | <400       | 31600           | PASS   |
| NVNT      | 3-DH5  | 2441            | 272.617                        | <400       | 31600           | PASS   |

### Minimum Frequency Occupation

| Condition | Packet | Frequency (MHz) | Burst Number | Limit | Sweep Time (ms) | Result |
|-----------|--------|-----------------|--------------|-------|-----------------|--------|
| NVNT      | 1-DH5  | 2441            | 3            | 1     | 910.856         | PASS   |
| NVNT      | 2-DH5  | 2441            | 3            | 1     | 918.449         | PASS   |
| NVNT      | 3-DH5  | 2441            | 1            | 1     | 921.421         | PASS   |


### Hopping Sequence

| Condition | Packet | Hopping Number | Limit | Band Allocation (%) | Limit Band Allocation (%) | Result |
|-----------|--------|----------------|-------|---------------------|---------------------------|--------|
| NVNT      | 1-DH5  | 79             | 15    | 94.62               | >70                       | PASS   |
| NVNT      | 2-DH5  | 79             | 15    | 94.62               | >70                       | PASS   |
| NVNT      | 3-DH5  | 79             | 15    | 94.65               | >70                       | PASS   |



## 8.HOPPING FREQUENCY SEPARATION

### 8.1 Block Diagram Of Test Setup

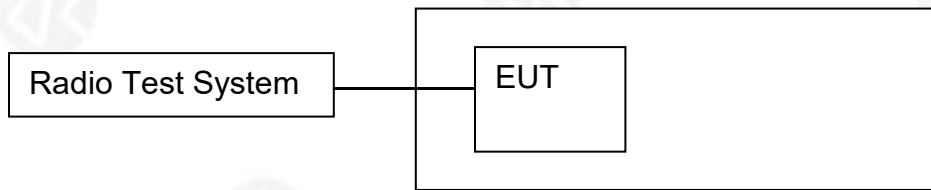

### 8.2 Limit

For Non-adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be equal to Occupied Channel Bandwidth (see clause 5.3.1.5.3) of a single hop, with a minimum separation of 100 kHz.

For Adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be 100 kHz.

### 8.3 Test procedure

The Hopping Frequency Separation as defined in clause 4.3.1.5 shall be measured and recorded using any of the following options. The selected option shall be stated in the test report.

#### Option 1

##### Step 1:

- The output of the transmitter shall be connected to a spectrum analyser or equivalent.
- The analyser shall be set as follows:
  - Centre Frequency: Centre of the two adjacent hopping frequencies
  - Frequency Span: Sufficient to see the complete power envelope of both hopping frequencies
  - RBW: 1 % of the span
  - VBW: 3 × RBW
  - Detector Mode: RMS
  - Trace Mode: Max Hold
  - Sweep time: 1 s

##### Step 2:

- Wait for the trace to stabilize.
- Use the marker function of the analyser to define the frequencies corresponding to the lower -20 dB point and the upper -20 dB point for both hopping frequencies F1 and F2. This will result in F1<sub>L</sub> and F1<sub>H</sub> for hopping frequency F1 and in F2<sub>L</sub> and F2<sub>H</sub> for hopping frequency F2. These values shall be recorded in the report.

##### Step 3:

- Calculate the centre frequencies F1<sub>c</sub> and F2<sub>c</sub> for both hopping frequencies using the formulas below.

These values shall be recorded in the report.

$$F1_c = \frac{F1_L + F1_H}{2} \quad F2_c = \frac{F2_L + F2_H}{2}$$

- Calculate the -20 dB channel bandwidth (BW<sub>CHAN</sub>) using the formula below. This value shall be recorded in the report.



$$BW_{\text{CHAN}} = F_{1H} - F_{1L}$$


- Calculate the Hopping Frequency Separation (FHS) using the formula below. This value shall be recorded in the report.

$$F_{\text{HS}} = F_{2C} - F_{1C}$$

- Compare the measured Hopping Frequency Separation with the limit defined in clause 4.3.1.5.3. In addition, for non-Adaptive Frequency Hopping equipment, the Hopping Frequency Separation shall be equal to or greater than Occupied Channel Bandwidth as defined in clause 4.3.1.8 or:

$$F_{\text{HS}} \geq \text{Occupied Channel Bandwidth}$$

- See figure 4:

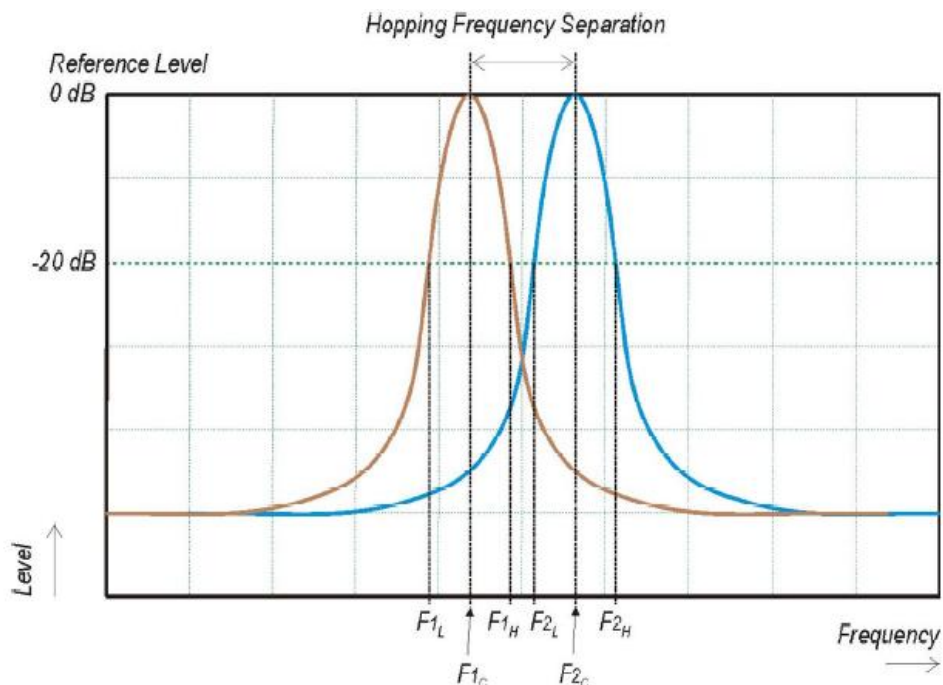

**Figure 4: Hopping Frequency Separation**

For adaptive equipment, in case of overlapping channels which will prevent the definition of the -20 dB reference points  $F_{1H}$  and  $F_{2L}$ , a higher reference level (e.g. -10 dB or -6 dB) may be chosen to define the reference points  $F_{1L}$ ;  $F_{1H}$ ;  $F_{2L}$  and  $F_{2H}$ .

Alternatively, special test software may be used to:

- force the UUT to hop or transmit on a single Hopping Frequency by which the -20 dB reference points can be measured separately for the two adjacent Hopping Frequencies; and/or
- force the UUT to operate without modulation by which the centre frequencies  $F_{1C}$  and  $F_{2C}$  can be measured directly.

The method used to measure the Hopping Frequency Separation shall be documented in the test report.



#### 8.4 Test Result

| Condition | Packet | Frequency (MHz) | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Result |
|-----------|--------|-----------------|---------------------|---------------------|-----------|-------------|--------|
| NVNT      | 1-DH5  | 2402            | 2401.986            | 2402.986            | 1.001     | 0.1         | PASS   |
| NVNT      | 1-DH5  | 2441            | 2440.991            | 2441.994            | 1.003     | 0.1         | PASS   |
| NVNT      | 1-DH5  | 2480            | 2479.993            | 2480.965            | 0.971     | 0.1         | PASS   |
| NVNT      | 2-DH5  | 2402            | 2401.951            | 2402.968            | 1.017     | 0.1         | PASS   |
| NVNT      | 2-DH5  | 2441            | 2440.975            | 2441.969            | 0.994     | 0.1         | PASS   |
| NVNT      | 2-DH5  | 2480            | 2479.969            | 2480.973            | 1.005     | 0.1         | PASS   |
| NVNT      | 3-DH5  | 2402            | 2401.981            | 2402.990            | 1.009     | 0.1         | PASS   |
| NVNT      | 3-DH5  | 2441            | 2440.984            | 2441.996            | 1.011     | 0.1         | PASS   |
| NVNT      | 3-DH5  | 2480            | 2479.986            | 2480.997            | 1.011     | 0.1         | PASS   |



## 9. ADAPTIVITY (ADAPTIVE FREQUENCY HOPPING)

### 9.1 Limit

Adaptive Frequency Hopping using other forms of FHSS using LBT

Adaptive FHSS equipment using LBT shall comply with the following minimum set of requirements:

1) At the start of every dwell time, before transmission on a hopping frequency, the equipment shall perform a Clear Channel Assessment (CCA) check using energy detect. The CCA observation time shall be not less than 0,2 % of the Channel Occupancy Time with a minimum of 18  $\mu$ s. If the equipment finds the hopping frequency to be clear, it may transmit immediately.

2) If it is determined that a signal is present with a level above the detection threshold defined in step 5 the hopping frequency shall be marked as 'unavailable'. Then the equipment may jump to the next frequency in the hopping scheme even before the end of the dwell time, but in that case the 'unavailable' channel cannot be considered as being 'occupied' and shall be disregarded with respect to the requirement of the minimum number of hopping frequencies as defined in clause 4.3.1.4.3.2. Alternatively, the equipment can remain on the frequency during the remainder of the dwell time. However, if the equipment remains on the frequency with the intention to transmit, it shall perform an Extended CCA check in which the (unavailable) channel is observed for a random duration between the value defined for the CCA observation time in step 1 and 5 % of the Channel Occupancy Time defined in step 3. If the Extended CCA check has determined the frequency to be no longer occupied, the hopping frequency becomes available again. If the Extended CCA time has determined the channel still to be occupied, it shall perform new Extended CCA checks until the channel is no longer occupied.

3) The total time during which an equipment has transmissions on a given hopping frequency without re evaluating the availability of that frequency is defined as the Channel Occupancy Time. The Channel Occupancy Time for a given hopping frequency, which starts immediately after a successful CCA, shall be less than 60 ms followed by an Idle Period of minimum 5 % of the Channel Occupancy Time with a minimum of 100  $\mu$ s. After the Idle Period has expired, the procedure as in step 1 shall be repeated before having new transmissions on this hopping frequency during the same dwell time. EXAMPLE: An equipment with a dwell time of 400 ms can have 6 transmission sequences of 60 ms each, separated with an Idle Period of 3 ms. Each transmission sequence was preceded with a successful CCA check of 120  $\mu$ s.

For LBT based adaptive FHSS equipment with a dwell time < 60 ms, the maximum Channel Occupancy Time is limited by the dwell time.

4) 'Unavailable' channels may be removed from or may remain in the Hopping Sequence, but in any case:

- apart from Short Control Signalling Transmissions referred to in clause 4.3.1.7.4, there shall be no transmissions on 'unavailable' channels;

- a minimum of N hopping frequencies as defined in clause 4.3.1.4.3.2 shall always be maintained.

5) The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to:

$$TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out}) \text{ (Pout in mW e.i.r.p.)}$$

6) The equipment shall comply with the requirements defined in step 1 to step 4 of the present clause in the presence of an unwanted CW signal as defined in table 2.

**Table 2: Unwanted Signal parameters**

| Wanted signal mean power from companion device                                                                                                                                                                                                                                                                                                  | Unwanted CW signal frequency (MHz) | Unwanted CW signal power (dBm) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--------------------------------|
| sufficient to maintain the link (see note 2)                                                                                                                                                                                                                                                                                                    | 2 395 or 2 488,5 (see note 1)      | -35 (see note 3)               |
| NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.                                                                                      |                                    |                                |
| NOTE 2: A typical conducted value which can be used in most cases is -50 dBm/MHz.                                                                                                                                                                                                                                                               |                                    |                                |
| NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna. |                                    |                                |


Note 2: The UUT is assumed to stop transmissions within a period equal to the maximum Channel Occupancy Time.



## 9.2 Test conditions

See ETSI EN 300 328 V2.2.2 Clause 5.4.6.1.

## 9.3 Test procedure

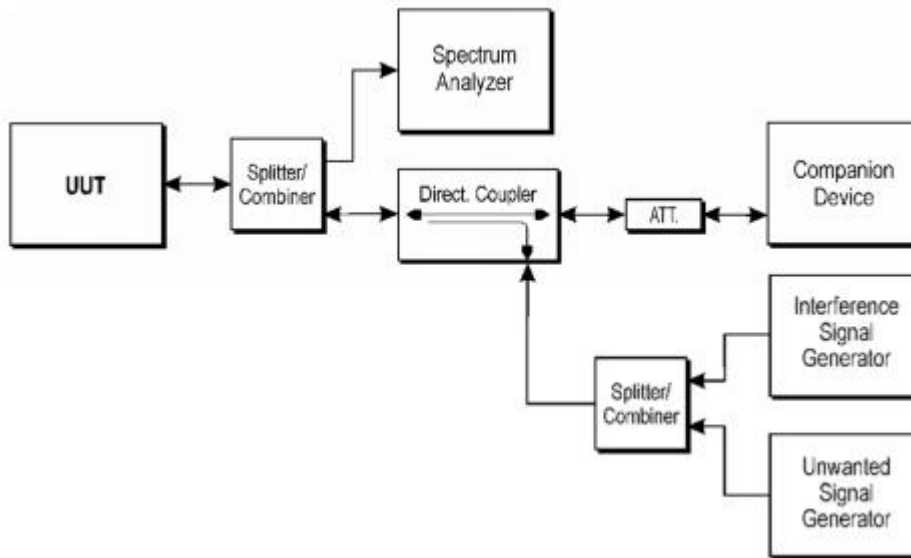

Interference and blocking signals are emulated by using a modulated signal and a continuous wave (CW) respectively, generated by the vector signal generator (VSG) and the continuous wave generator.

## 9.4 Test Result


N/A

Remark: this requirement does not apply for equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.



## 10. OCCUPIED CHANNEL BANDWIDTH

### 10.1 Block Diagram Of Test Setup

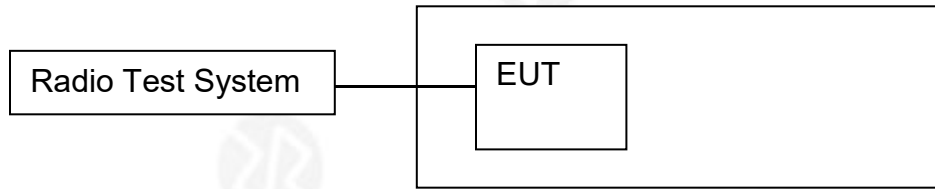

### 10.2 Limit

The Occupied Channel Bandwidth shall fall completely within the band given in 2.4GHz to 2.4835GHz. In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

### 10.3 Test procedure

#### Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW: 3 × RBW
- Frequency Span: 2 × Nominal Channel Bandwidth
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

#### Step 2:

Wait for the trace to stabilize.

Find the peak value of the trace and place the analyser marker on this peak.

#### Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT.

This value shall be recorded.

NOTE: Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.




### 10.4 Test Result

| Condition | Modulation     | Packet Type | Frequency (MHz) | Frequency Range (MHz) |          | Limit (MHz) | Channel Bandwidth (MHz) |
|-----------|----------------|-------------|-----------------|-----------------------|----------|-------------|-------------------------|
|           |                |             |                 |                       |          |             |                         |
| NVNT      | GFSK           | 1-DH5       | 2402            | 2401.501              | /        | >2400       | 0.8930                  |
|           |                |             | 2480            | /                     | 2479.662 | <2483.50    | 0.8987                  |
| NVNT      | $\pi/4$ -DQPSK | 2-DH5       | 2402            | 2401.306              | /        | >2400       | 1.0498                  |
|           |                |             | 2480            | /                     | 2479.637 | <2483.50    | 1.0862                  |
| NVNT      | 8-DPSK         | 3-DH5       | 2402            | 2401.431              | /        | >2400       | 1.0927                  |
|           |                |             | 2480            | /                     | 2479.784 | <2483.50    | 1.0549                  |

## 11. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

### 11.1 Block Diagram Of Test Setup

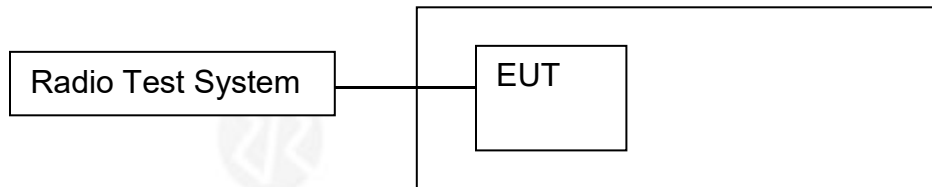

### 11.2 Limit

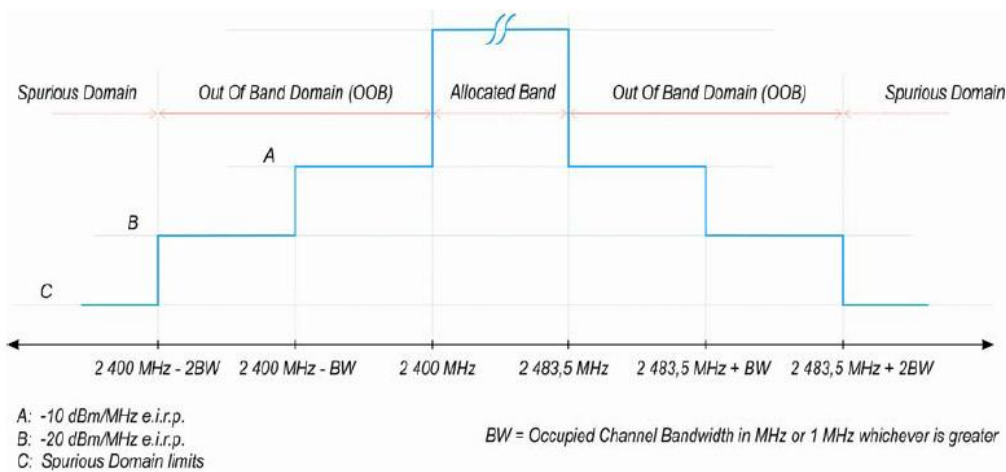


Figure 3: Transmit mask

### 11.3 Test procedure

The applicable mask is defined by the measurement results from the tests performed under clause 5.3.8 (Occupied Channel Bandwidth).

The test procedure is further as described under clause 5.3.9.2.1.

The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the steps below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.

#### Step 1:

- Connect the UUT to the spectrum analyser and use the following settings:
  - Centre Frequency: 2 484 MHz
  - Span: 0 Hz
  - Resolution BW: 1 MHz
  - Filter mode: Channel filter
  - Video BW: 3 MHz
  - Detector Mode: RMS
  - Trace Mode: Max Hold



- Sweep Mode: Continuous
- Sweep Points: Sweep Time [s] / (1  $\mu$ s) or 5 000 whichever is greater
- Trigger Mode: Video trigger

NOTE 1: In case video triggering is not possible, an external trigger source may be used.

- Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

Step 2 (segment 2 483,5 MHz to 2 483,5 MHz + BW):

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3 (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW):

- Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 4 (segment 2 400 MHz - BW to 2 400 MHz):

- Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 5 (segment 2 400 MHz - 2BW to 2 400 MHz - BW):

- Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 6:



- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits

provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.

- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:

- Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.

- Option 2: the limits provided by the mask given in figure 1 or figure 3 shall be reduced by  $10 \times \log_{10}(A_{ch})$  and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.

NOTE 2:  $A_{ch}$  refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.



11.4 Test Result


| Condition | Mode  | Frequency<br>(MHz) | OOB<br>Frequency<br>(MHz) | Level<br>(dBm/MHz) | Limit<br>(dBm/MHz) | Margin<br>(dB) | Verdict |
|-----------|-------|--------------------|---------------------------|--------------------|--------------------|----------------|---------|
| NVNT      | 1-DH5 | Hopping            | 2399.5                    | -66.09             | -10.00             | -56.09         | Pass    |
| NVNT      | 1-DH5 | Hopping            | 2398.5                    | -57.60             | -20.00             | -37.60         | Pass    |
| NVNT      | 1-DH5 | Hopping            | 2484                      | -57.03             | -10.00             | -47.03         | Pass    |
| NVNT      | 1-DH5 | Hopping            | 2485                      | -56.14             | -20.00             | -36.14         | Pass    |
| NVNT      | 1-DH5 | Hopping            | 2399.5                    | -56.69             | -10.00             | -46.69         | Pass    |
| NVNT      | 1-DH5 | Hopping            | 2398.5                    | -51.50             | -20.00             | -31.50         | Pass    |
| NVNT      | 1-DH5 | Hopping            | 2484                      | -56.62             | -10.00             | -46.62         | Pass    |
| NVNT      | 1-DH5 | Hopping            | 2485                      | -66.44             | -20.00             | -46.44         | Pass    |
| NVNT      | 2-DH5 | Hopping            | 2399.5                    | -52.76             | -10.00             | -42.76         | Pass    |
| NVNT      | 2-DH5 | Hopping            | 2398.5                    | -71.43             | -20.00             | -51.43         | Pass    |
| NVNT      | 2-DH5 | Hopping            | 2484                      | -54.26             | -10.00             | -44.26         | Pass    |
| NVNT      | 2-DH5 | Hopping            | 2485                      | -63.87             | -20.00             | -43.87         | Pass    |
| NVNT      | 2-DH5 | Hopping            | 2399.5                    | -51.89             | -10.00             | -41.89         | Pass    |
| NVNT      | 2-DH5 | Hopping            | 2398.5                    | -68.47             | -20.00             | -48.47         | Pass    |
| NVNT      | 2-DH5 | Hopping            | 2484                      | -59.91             | -10.00             | -49.91         | Pass    |
| NVNT      | 2-DH5 | Hopping            | 2485                      | -61.37             | -20.00             | -41.37         | Pass    |
| NVNT      | 3-DH5 | Hopping            | 2399.5                    | -59.35             | -10.00             | -49.35         | Pass    |
| NVNT      | 3-DH5 | Hopping            | 2398.5                    | -53.68             | -20.00             | -33.68         | Pass    |
| NVNT      | 3-DH5 | Hopping            | 2484                      | -55.46             | -10.00             | -45.46         | Pass    |
| NVNT      | 3-DH5 | Hopping            | 2485                      | -50.27             | -20.00             | -30.27         | Pass    |
| NVNT      | 3-DH5 | Hopping            | 2399.5                    | -57.00             | -10.00             | -47.00         | Pass    |
| NVNT      | 3-DH5 | Hopping            | 2398.5                    | -57.22             | -20.00             | -37.22         | Pass    |
| NVNT      | 3-DH5 | Hopping            | 2484                      | -54.40             | -10.00             | -44.40         | Pass    |
| NVNT      | 3-DH5 | Hopping            | 2485                      | -65.72             | -20.00             | -45.72         | Pass    |




## 12. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

### 12.1 Block Diagram Of Test Setup (Radiated)


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

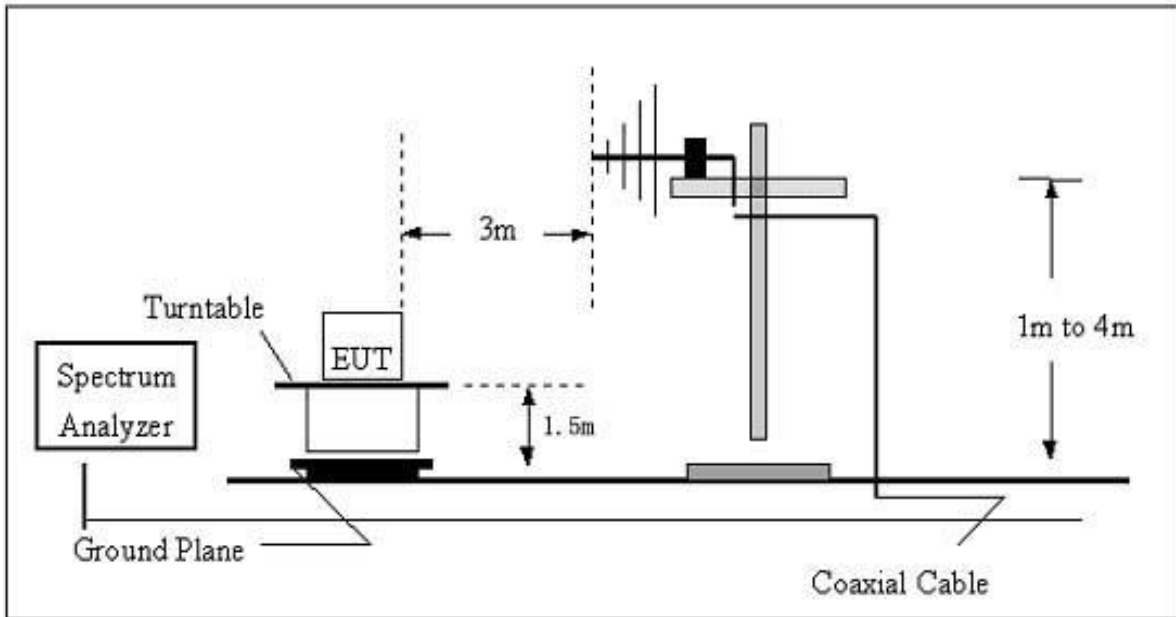

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

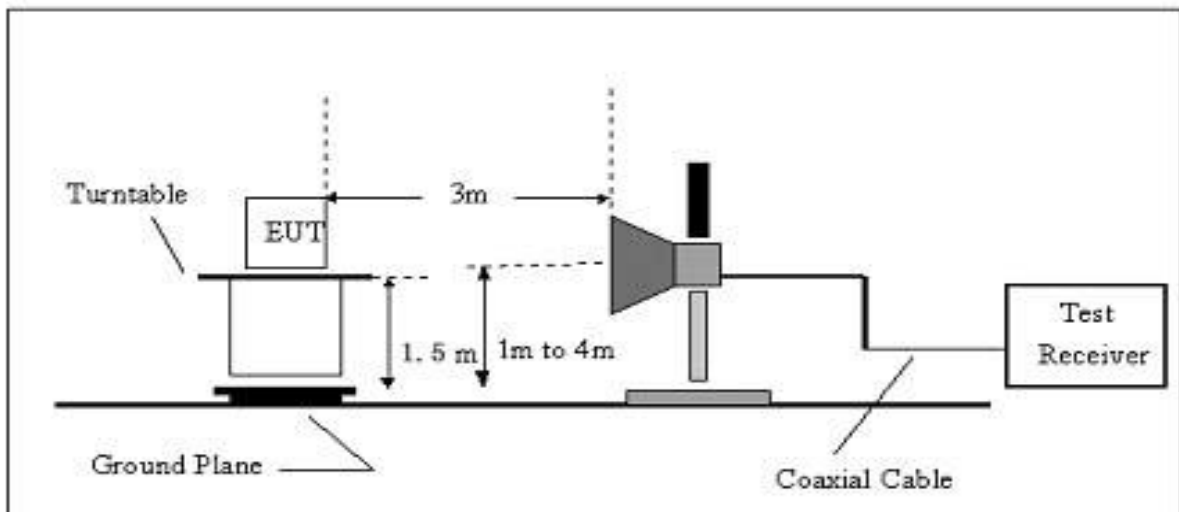

### Block Diagram Of Test Setup (Conducted)

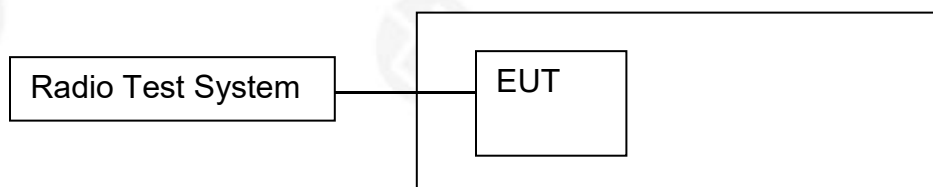



## 12.2 Limits

| Frequency range     | Maximum power,<br>e.r.p. ( $\leq 1$ GHz)<br>e.i.r.p. ( $> 1$ GHz) | RBW/VBW        |
|---------------------|-------------------------------------------------------------------|----------------|
| 30 MHz to 47 MHz    | -36 dBm                                                           | 100 kHz/300KHz |
| 47 MHz to 74 MHz    | -54 dBm                                                           | 100 kHz/300KHz |
| 74 MHz to 87,5 MHz  | -36 dBm                                                           | 100 kHz/300KHz |
| 87,5 MHz to 118 MHz | -54 dBm                                                           | 100 kHz/300KHz |
| 118 MHz to 174 MHz  | -36 dBm                                                           | 100 kHz/300KHz |
| 174 MHz to 230 MHz  | -54 dBm                                                           | 100 kHz/300KHz |
| 230 MHz to 470 MHz  | -36 dBm                                                           | 100 kHz/300KHz |
| 470 MHz to 862 MHz  | -54 dBm                                                           | 100 kHz/300KHz |
| 862 MHz to 1 GHz    | -36 dBm                                                           | 100 kHz/300KHz |
| 1 GHz to 12,75 GHz  | -30 dBm                                                           | 1 MHz/3MHz     |

## 12.3 Test Procedure

The following table is the setting of the Spectrum Analyzer.

| Spectrum Analyzer       | Setting                                                                                                                                                                                                                                                                                             |                               |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Frequency Start to Stop | 30 MHz to 1000 MHz                                                                                                                                                                                                                                                                                  | 1000 MHz to 12750MHz          |
| Resolution bandwidth    | 100 kHz                                                                                                                                                                                                                                                                                             | 1 MHz                         |
| Video bandwidth         | 300 kHz                                                                                                                                                                                                                                                                                             | 3 MHz                         |
| Filter type             | 3 dB (Gaussian)                                                                                                                                                                                                                                                                                     |                               |
| Detector mode           | Peak                                                                                                                                                                                                                                                                                                |                               |
| Trace Mode              | Max Hold                                                                                                                                                                                                                                                                                            |                               |
| Sweep Points            | $\geq 19\ 400$ (Set as 20000)                                                                                                                                                                                                                                                                       | $\geq 23\ 500$ (Set as 24000) |
| Sweep Time              | For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, Below 1GHz such that for each 100 kHz frequency step, Above 1GHz such that for each 1MHz frequency step the measurement time is greater than two transmissions of the UUT, on any channel |                               |



30MHz ~ 1GHz:

- a. The Product was placed on the nonconductive turntable 1.5m above the ground in a full anechoic chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Above 1GHz:

- a. The Product was placed on the non-conductive turntable 1.5 m above the ground in a full anechoic chamber..
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.



## 12.4 Test Results

Radiated Transmitter unwanted emissions:

|              |          |                    |         |
|--------------|----------|--------------------|---------|
| Temperature: | 25°C     | Relative Humidity: | 60 %    |
| Pressure:    | 1012 hPa | Test Voltage :     | DC 3.7V |

| Frequency<br>(MHz) | Receiver Reading<br>(dBm) | Turn table Angle<br>Degree | Antenna       |                | Substituted<br>Factor<br>(dB) | Absolute Level<br>(dBm) | Result         |                |
|--------------------|---------------------------|----------------------------|---------------|----------------|-------------------------------|-------------------------|----------------|----------------|
|                    |                           |                            | Height<br>(m) | Polar<br>(H/V) |                               |                         | Limit<br>(dBm) | Margin<br>(dB) |
| GFSK Low channel   |                           |                            |               |                |                               |                         |                |                |
| 562.438            | -56.85                    | 23                         | 1.9           | H              | -9.59                         | -66.44                  | -54.00         | -12.44         |
| 562.421            | -48.00                    | 273                        | 1.7           | V              | -9.59                         | -57.59                  | -54.00         | -3.59          |
| 4804.081           | -48.35                    | 195                        | 1.1           | H              | -0.12                         | -48.47                  | -30.00         | -18.47         |
| 4804.158           | -57.27                    | 68                         | 1.6           | V              | -0.12                         | -57.39                  | -30.00         | -27.39         |
| 7206.149           | -56.19                    | 78                         | 1.9           | H              | 0.55                          | -55.64                  | -30.00         | -25.64         |
| 7206.524           | -55.99                    | 302                        | 1.7           | V              | 0.55                          | -55.44                  | -30.00         | -25.44         |
| GFSK Mid channel   |                           |                            |               |                |                               |                         |                |                |
| 562.343            | -54.95                    | 230                        | 1.7           | H              | -9.59                         | -64.54                  | -54.00         | -10.54         |
| 562.407            | -56.16                    | 306                        | 1.9           | V              | -9.59                         | -65.75                  | -54.00         | -11.75         |
| 4882.415           | -48.87                    | 98                         | 1.4           | H              | -0.12                         | -48.99                  | -30.00         | -18.99         |
| 4882.350           | -48.04                    | 175                        | 1.8           | V              | -0.12                         | -48.16                  | -30.00         | -18.16         |
| 7323.126           | -56.97                    | 119                        | 1.4           | H              | 0.55                          | -56.42                  | -30.00         | -26.42         |
| 7323.401           | -56.51                    | 168                        | 1.9           | V              | 0.55                          | -55.96                  | -30.00         | -25.96         |
| GFSK High channel  |                           |                            |               |                |                               |                         |                |                |
| 562.174            | -55.61                    | 278                        | 2             | H              | -9.59                         | -65.20                  | -54.00         | -11.20         |
| 562.507            | -56.58                    | 204                        | 2             | V              | -9.59                         | -66.17                  | -54.00         | -12.17         |
| 4960.191           | -48.96                    | 286                        | 1.7           | H              | -0.12                         | -49.08                  | -30.00         | -19.08         |
| 4960.437           | -47.80                    | 198                        | 1.3           | V              | -0.12                         | -47.92                  | -30.00         | -17.92         |
| 7440.421           | -58.17                    | 59                         | 1.8           | H              | 0.55                          | -57.62                  | -30.00         | -27.62         |
| 7440.140           | -56.05                    | 335                        | 1.6           | V              | 0.55                          | -55.50                  | -30.00         | -25.50         |


Remark: Absolute Level = Receiver Reading + Factor, Margin = Absolute Level - Limit.  
All modes passed the test and only the worst data -GFSK - was recorded.




### 13.RECEIVER SPURIOUS EMISSIONS

#### 13.1 Block Diagram Of Test Setup (Radiated)


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

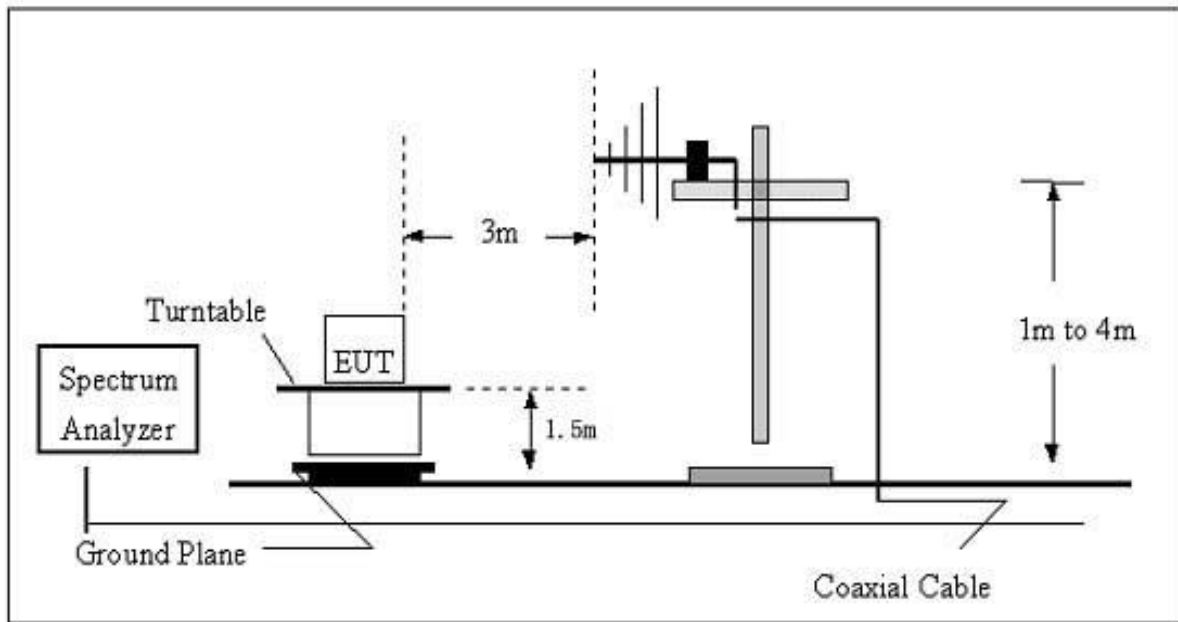

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

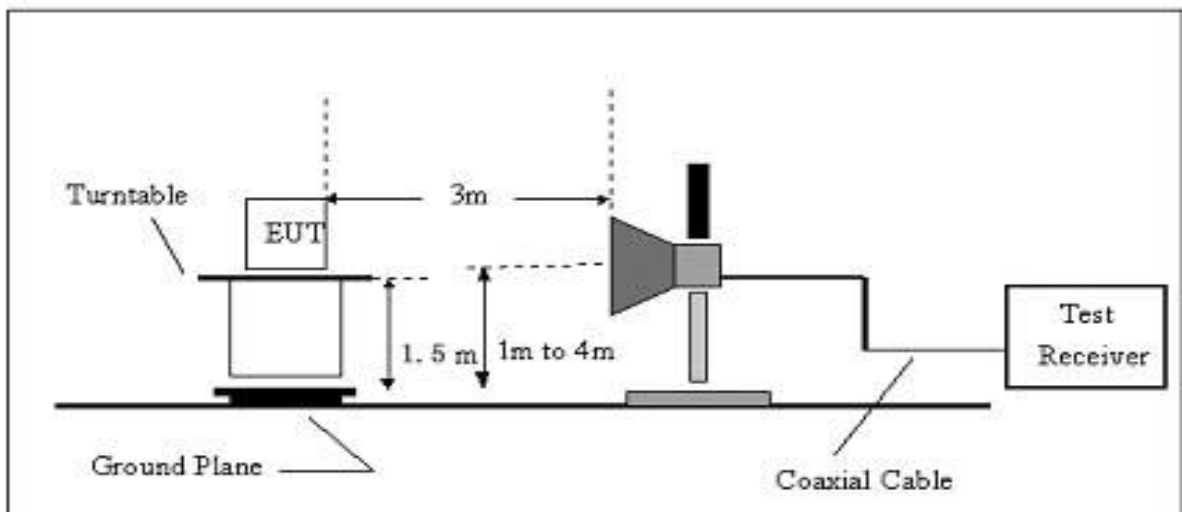

#### Block Diagram Of Test Setup (Conducted)

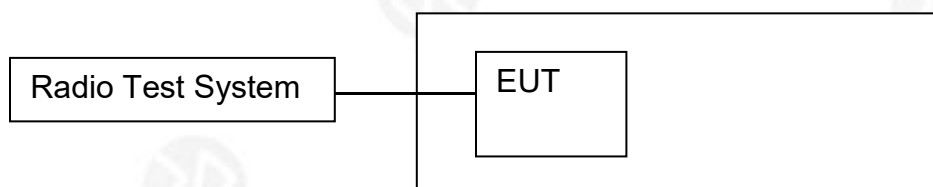



### 13.2 Limits

| Frequency(MHz) | Limit  |
|----------------|--------|
| 30-1000        | -57dBm |
| 1000-12750     | -47dBm |

### 13.3 Test Procedure

The following table is the setting of the Spectrum Analyzer.

| Spectrum Analyzer       | Setting                                                                                                                                                                                                                                                                                            |                         |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Frequency Start to Stop | 30 MHz to 1000 MHz                                                                                                                                                                                                                                                                                 | 1000 MHz to 12750MHz    |
| Resolution bandwidth    | 100 kHz                                                                                                                                                                                                                                                                                            | 1 MHz                   |
| Video bandwidth         | 300 kHz                                                                                                                                                                                                                                                                                            | 3 MHz                   |
| Filter type             | 3 dB (Gaussian)                                                                                                                                                                                                                                                                                    |                         |
| Detector mode           | Peak                                                                                                                                                                                                                                                                                               |                         |
| Trace Mode              | Max Hold                                                                                                                                                                                                                                                                                           |                         |
| Sweep Points            | ≥ 19 400 (Set as 20000)                                                                                                                                                                                                                                                                            | ≥ 23 500 (Set as 24000) |
| Sweep Time              | For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long,Below 1GHz such that for each 100 kHz frequency step, Above 1GHz such that for each 1MHz frequency step the measurement time is greater than two transmissions of the UUT, on any channel |                         |

30MHz ~ 1GHz:

- The Product was placed on the nonconductive turntable 1.5m above the ground in a full anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Above 1GHz:

- The Product was placed on the non-conductive turntable 1.5 m above the ground in a full anechoic chamber..
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.



### 13.4 Test Results

Radiated Receiver spurious emissions:

|              |          |                    |         |
|--------------|----------|--------------------|---------|
| Temperature: | 25°C     | Relative Humidity: | 60 %    |
| Pressure:    | 1012 hPa | Test Voltage :     | DC 3.7V |


| Frequency<br>(MHz) | Receiver Reading<br>(dBm) | Turn table Angle<br>Degree | Antenna       |                | Substituted<br>Factor<br>(dB) | Absolute Level<br>(dBm) | Result         |                |
|--------------------|---------------------------|----------------------------|---------------|----------------|-------------------------------|-------------------------|----------------|----------------|
|                    |                           |                            | Height<br>(m) | Polar<br>(H/V) |                               |                         | Limit<br>(dBm) | Margin<br>(dB) |
| GFSK Low channel   |                           |                            |               |                |                               |                         |                |                |
| 570.775            | -54.82                    | 346                        | 1.5           | H              | -9.64                         | -64.46                  | -54.00         | -10.46         |
| 570.775            | -54.54                    | 90                         | 1.1           | V              | -9.64                         | -64.18                  | -54.00         | -10.18         |
| 3232.5             | -60.47                    | 309                        | 1.3           | H              | 1.41                          | -59.06                  | -47.00         | -12.06         |
| 3232.5             | -64.38                    | 264                        | 1.6           | V              | 1.41                          | -62.97                  | -47.00         | -15.97         |
| 8901.875           | -69.23                    | 346                        | 1.5           | H              | 15.44                         | -53.79                  | -47.00         | -6.79          |
| 8901.875           | -69.65                    | 90                         | 1.1           | V              | 15.44                         | -54.21                  | -47.00         | -7.21          |
| GFSK Mid channel   |                           |                            |               |                |                               |                         |                |                |
| 677.475            | -54.72                    | 222                        | 1.6           | H              | -7.68                         | -62.40                  | -54.00         | -8.40          |
| 677.475            | -53.35                    | 105                        | 1.7           | V              | -7.68                         | -61.03                  | -54.00         | -7.03          |
| 2263.125           | -61.66                    | 203                        | 1.4           | H              | -0.12                         | -61.78                  | -47.00         | -14.78         |
| 2263.125           | -63.10                    | 67                         | 1.2           | V              | -0.12                         | -63.22                  | -47.00         | -16.22         |
| 9695               | -74.83                    | 222                        | 1.6           | H              | 18.08                         | -56.75                  | -47.00         | -9.75          |
| 9695               | -73.40                    | 105                        | 1.7           | V              | 18.08                         | -55.32                  | -47.00         | -8.32          |
| GFSK High channel  |                           |                            |               |                |                               |                         |                |                |
| 531.975            | -54.81                    | 148                        | 1.1           | H              | -10.73                        | -65.54                  | -54.00         | -11.54         |
| 531.975            | -52.46                    | 333                        | 1.3           | V              | -10.73                        | -63.19                  | -54.00         | -9.19          |
| 9665.625           | -69.08                    | 18                         | 1.6           | H              | 17.98                         | -51.10                  | -47.00         | -4.10          |
| 9665.625           | -71.60                    | 80                         | 1.8           | V              | 17.98                         | -53.62                  | -47.00         | -6.62          |
| 11575              | -72.75                    | 148                        | 1.1           | H              | 20.23                         | -52.52                  | -47.00         | -5.52          |
| 11575              | -73.61                    | 333                        | 1.3           | V              | 20.23                         | -53.38                  | -47.00         | -6.38          |

Remark: Absolute Level = Receiver Reading + Factor, Margin = Absolute Level - Limit.  
All modes passed the test and only the worst data -GFSK - was recorded.



## 14. RECEIVER BLOCKING

### 14.1 Block Diagram Of Test Setup

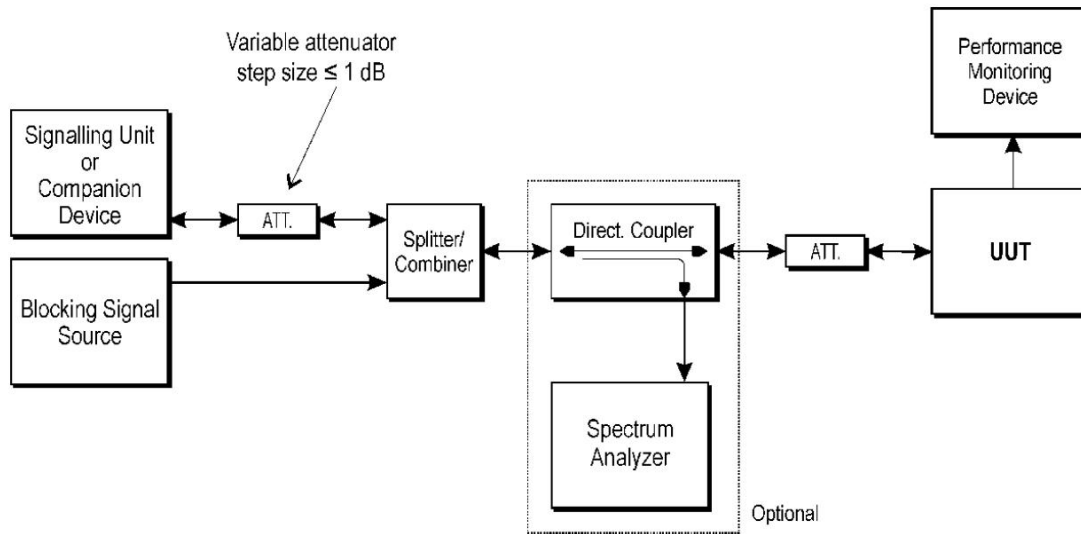

### 14.2 Limit

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.

**Table 14: Receiver Blocking parameters for Receiver Category 1 equipment**

| Wanted signal mean power from companion device (dBm)<br>(see notes 1 and 4)                                       | Blocking signal frequency (MHz)                    | Blocking signal power (dBm)<br>(see note 4) | Type of blocking signal |
|-------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------|-------------------------|
| $(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or $-68 \text{ dBm}$<br>whichever is less<br>(see note 2) | 2 380<br>2 504                                     |                                             |                         |
| $(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or $-74 \text{ dBm}$<br>whichever is less<br>(see note 3) | 2 300<br>2 330<br>2 360<br>2 524<br>2 584<br>2 674 | -34                                         | CW                      |

NOTE 1: OCBW is in Hz.  
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to  $P_{\min} + 26 \text{ dB}$  where  $P_{\min}$  is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.  
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to  $P_{\min} + 20 \text{ dB}$  where  $P_{\min}$  is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.  
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.



**Table 15: Receiver Blocking parameters receiver Category 2 equipment**

| Wanted signal mean power from companion device (dBm)<br>(see notes 1 and 3)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Blocking signal frequency (MHz)  | Blocking signal power (dBm)<br>(see note 3) | Type of blocking signal |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------------------------------------|-------------------------|
| (-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB)<br>or (-74 dBm + 10 dB) whichever is less<br>(see note 2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2 380<br>2 504<br>2 300<br>2 584 | -34                                         | CW                      |
| <p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to <math>P_{min} + 26</math> dB where <math>P_{min}</math> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p> |                                  |                                             |                         |

**Table 16: Receiver Blocking parameters receiver Category 3 equipment**

| Wanted signal mean power from companion device (dBm)<br>(see notes 1 and 3)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Blocking signal frequency (MHz)  | Blocking signal power (dBm)<br>(see note 3) | Type of blocking signal |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------------------------------------|-------------------------|
| (-139 dBm + 10 × log <sub>10</sub> (OCBW) + 20 dB)<br>or (-74 dBm + 20 dB) whichever is less<br>(see note 2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2 380<br>2 504<br>2 300<br>2 584 | -34                                         | CW                      |
| <p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to <math>P_{min} + 30</math> dB where <math>P_{min}</math> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p> |                                  |                                             |                         |

### 14.3 Test procedure

Refer to ETSI EN 300 328 Clause 5.4.11.2.



14.4 Test Result

|                    |          |                    |         |
|--------------------|----------|--------------------|---------|
| Temperature:       | 25°C     | Relative Humidity: | 60 %    |
| Pressure:          | 1012 hPa | Test Voltage :     | DC 3.7V |
| Receiver Category: | 2        |                    |         |

| Test Mode | Test Channel (MHz) | Wanted signal mean power from companion device (dBm) | Blocking signal frequency (MHz) | Blocking signal power (dBm) (see note 3) | PER (%) | Limit (%) | Result |
|-----------|--------------------|------------------------------------------------------|---------------------------------|------------------------------------------|---------|-----------|--------|
| 1-DH5     | 2402               | -69.49                                               | 2380                            | -34                                      | 3.65    | 10        | Pass   |
|           |                    |                                                      | 2504                            |                                          | 2.76    | 10        | Pass   |
|           |                    |                                                      | 2300                            |                                          | 3.72    | 10        | Pass   |
|           |                    |                                                      | 2584                            |                                          | 2.40    | 10        | Pass   |

Note: The wanted signal mean power from the companion device and the blocking signal power level values are compensated with the declared antenna gain on table above.



## 15. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission Test Setup 1  
30 MHz - 1 GHz (Transmitter tests)



Radiated Emission Test Setup 2  
1 GHz - 12.75 GHz (Transmitter tests)



**ENDOFREPORT**